


25W Constant Current – IP65



■ Approve

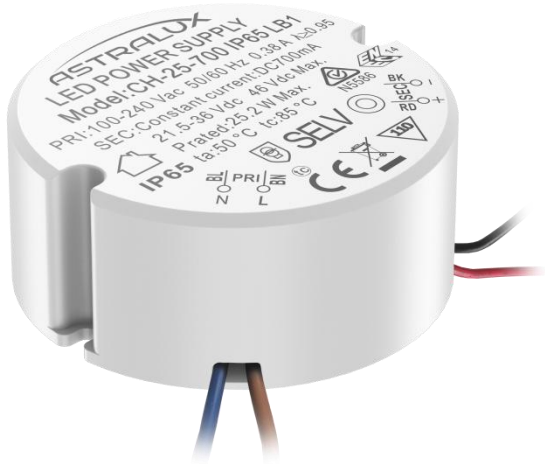

Features

- Class II, SELV, Built-in
- Input Voltage 100-240VAC
- Protections: SCP/OLP/OVP
- Power Factor 0.95C
- Efficiency $\geq 86\%$
- IP65 Ingress protection
- 5 years warranty

Applications


- Outdoor-Wall light
- Lawn light

◆ Description

CH-25-XXX IP65 LB1 is an 25W constant current LED driver that operates from 90-264Vac input with 300 to 800mA output current. With it's compact dimensions from $\Phi 65 \times 28\text{mm}$ it is easy to integrate in Outdoor-Wall light lights and Lawn lights. To ensure trouble-free operation, protection is provided against output short circuit and over Load

◆ Model code

CH-25-XXX IP65 LB1

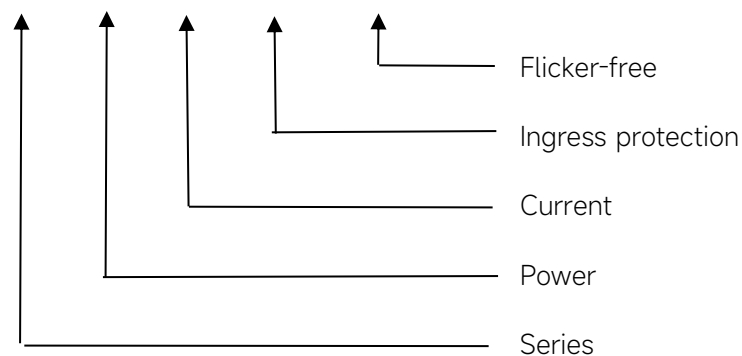

◆ Specification


Output	Constant Current	300mA	350mA	500mA	...	700mA
	Voltage Range	50-84VDC	43-72VDC	30-50VDC	...	19-31.5VDC
	Unload voltage Max.	98VDC	85VDC	63VDC	...	42VDC
	Current Accuracy	±5%				
	Output HF current ripple(≥1KHz)	±5%				
	Output LF current ripple(≤120Hz)	±5%				
	SVM	≤0.4				
	Pst	≤1				
	Efficiency(Typ.)	≥86%				
Input	Rated input voltage	100-240VAC				
	Range of input voltage	90-264VAC				
	Frequency(Hz)	50/60 Hz				
	Displacement factor	≥0.9				
	Power Factor	0.95C				
	Input Current max	0.38A				
	Start-up time	< 0.5S				
	No Load Power	≤0.5W				
	THD (Typ.)	< 12%				
Protection	Over Load Protection	103-120%				
		YES/Auto Resume				
	Over Voltage Protection	> 98VDC	> 85VDC	> 63VDC	...	> 42VDC
		YES/Auto Resume				
	Short circuit Protection	YES/Auto Resume				
capability	Surge capability (L-N)	1KV				
	Surge capability (L/N-Ground)	NA				
Environment	Operating Temperature	-20°C~~+50°C				
	Humidity	20%-90%RH				
	Tc	85°C				
	Storage Temperature	-25°C~~+60°C				
	Life time	> 50000h@Tc=80°C,230VAC				
	Noise	≤20dB(A)@10cm				
Surface	Dimension	Φ65X28(DXH)mm				
standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547;					
Others	ErP	EU 2019/2020				
	RoHS	RoHS (2011/65/EU) (EU)2015/863				
Note	1.All parameters NOT specially mentioned are measured at 240VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor.					

◆ Model list

NO.	Model number	Output			Max.Prated (W)
		Constant current (mA)	Normal working voltage (VDC)	No load working voltage (VDC)	
1	CH-25-300 IP65 LB	300	50-84	98	25.2
2	CH-25-350 IP65 LB	350	43-72	85	25.2
3	CH-25-400 IP65 LB	400	37.5-63	75	25.2
4	CH-25-450 IP65 LB	450	33.5-56	68	25.2
5	CH-25-500 IP65 LB	500	30-50	63	25
6	CH-25-550 IP65 LB	550	27-45.5	55	25
7	CH-25-600 IP65 LB	600	25-42	50	25.2
8	CH-25-650 IP65 LB	650	23-38.5	50	25
9	CH-25-700 IP65 LB	700	21.5-36	46	25.2
10	CH-25-750 IP65 LB	750	20-33.5	44	25.1
11	CH-25-800 IP65 LB	800	19-31.5	42	25.2

◆ Inrush Current


I _{peak}	T _{width}	B10	B16	B20	C10	C16	C20
13.4A	116μs	21pcs	33pcs	42pcs	21pcs	33pcs	42pcs

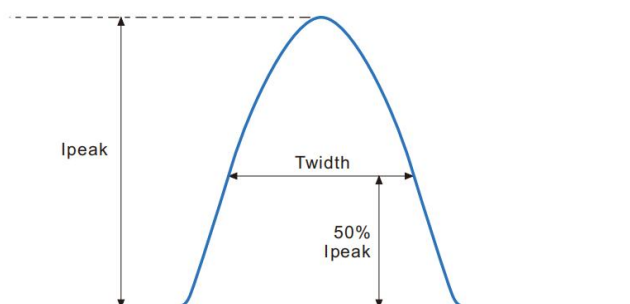


Remarks:

- 1.The number of drives mounted under different MCBs in the table is the maximum value. Please do not exceed this number during installation.
- 2.Different brands and models of miniature circuit breakers, the number of drives mounted will be slightly different.

◆ Wiring diagram

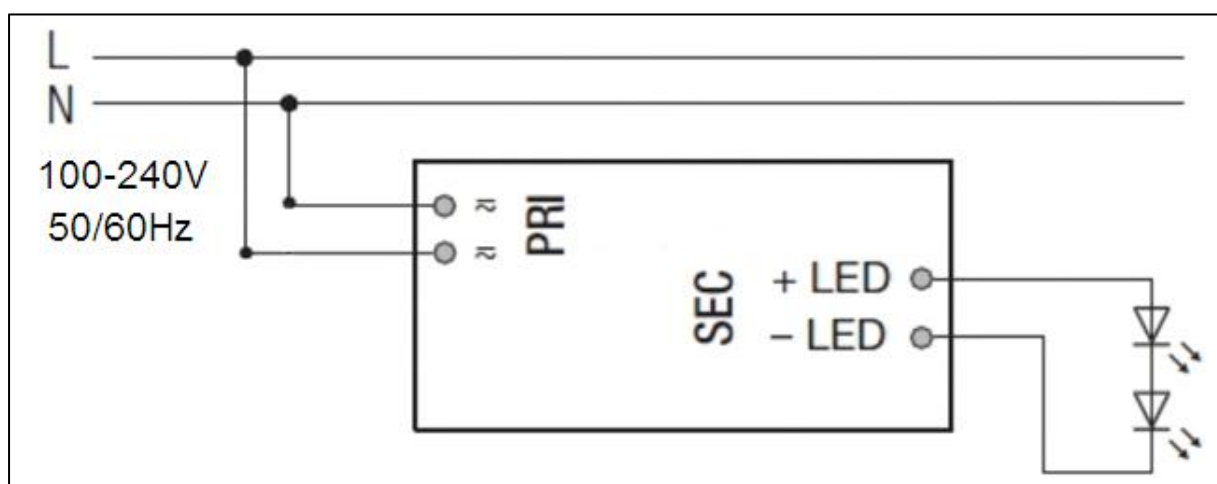


◆ 2D diagram

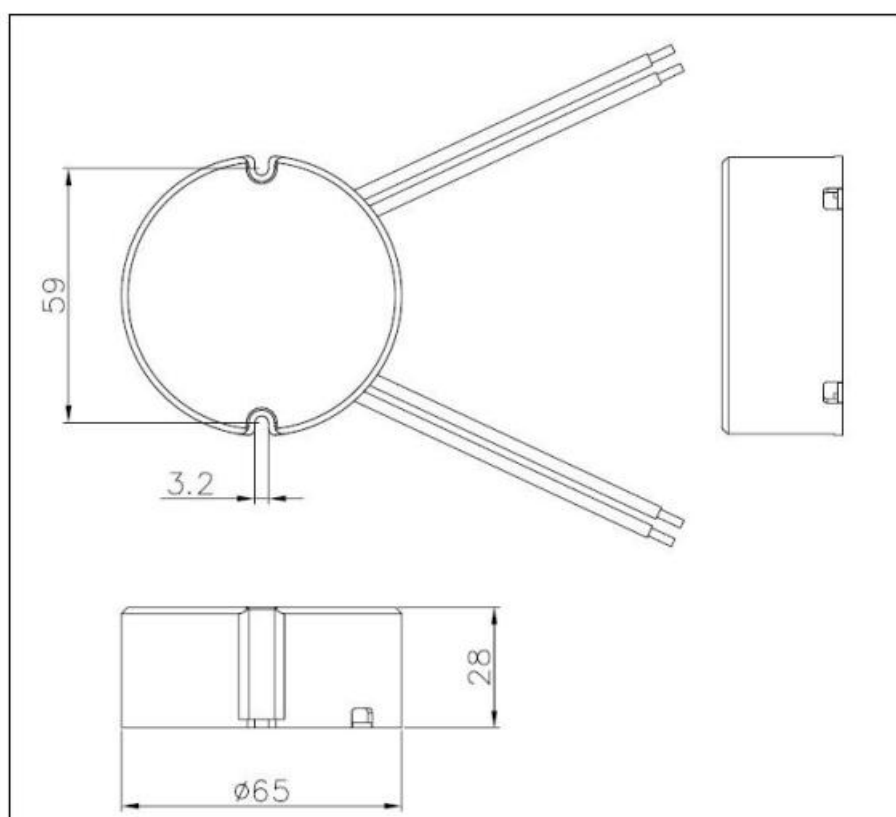


◆ Curve for CH-25-350 IP65 LB, $I_o=350\text{mA}$


Lifetime vs. Temperature Curve

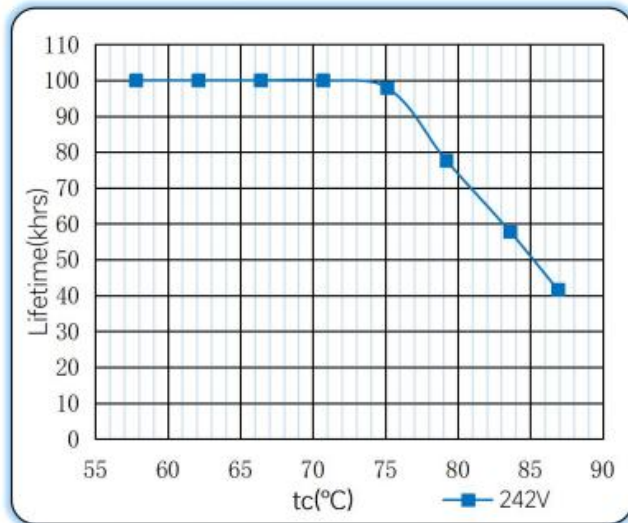


Efficiency vs. Load

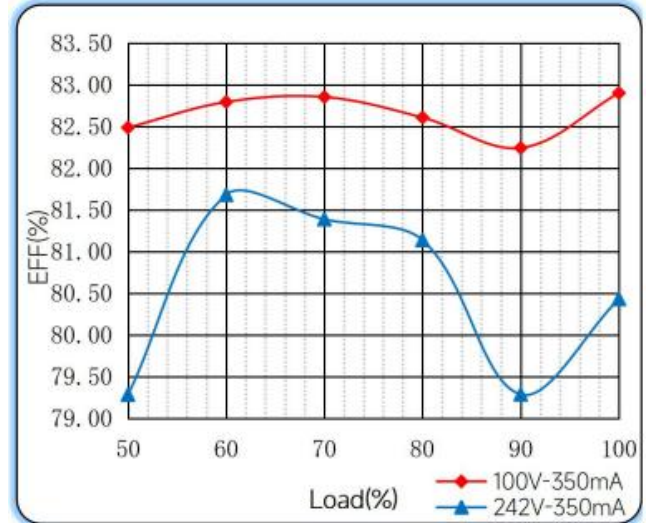


Power Factor Characteristics

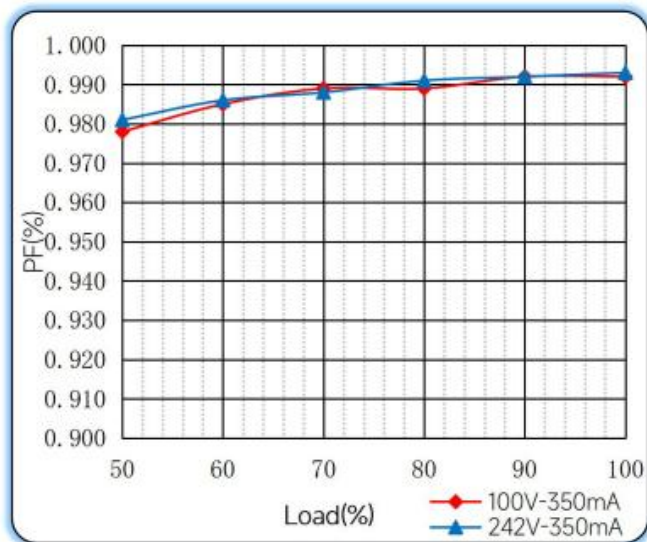

THD vs. Load

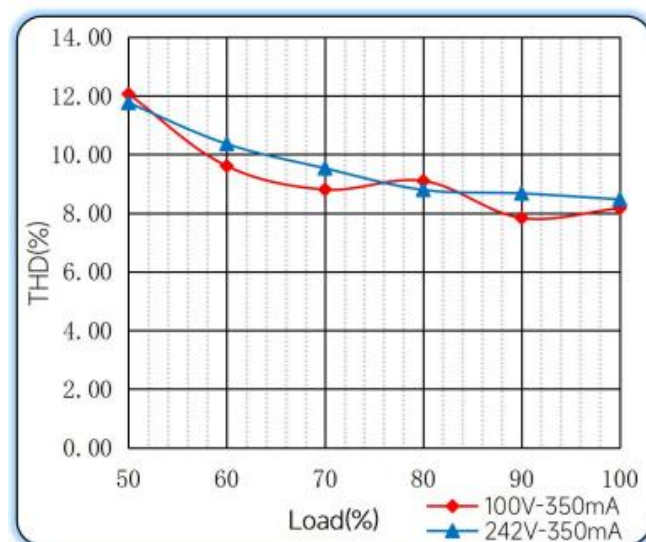

◆ Operating window

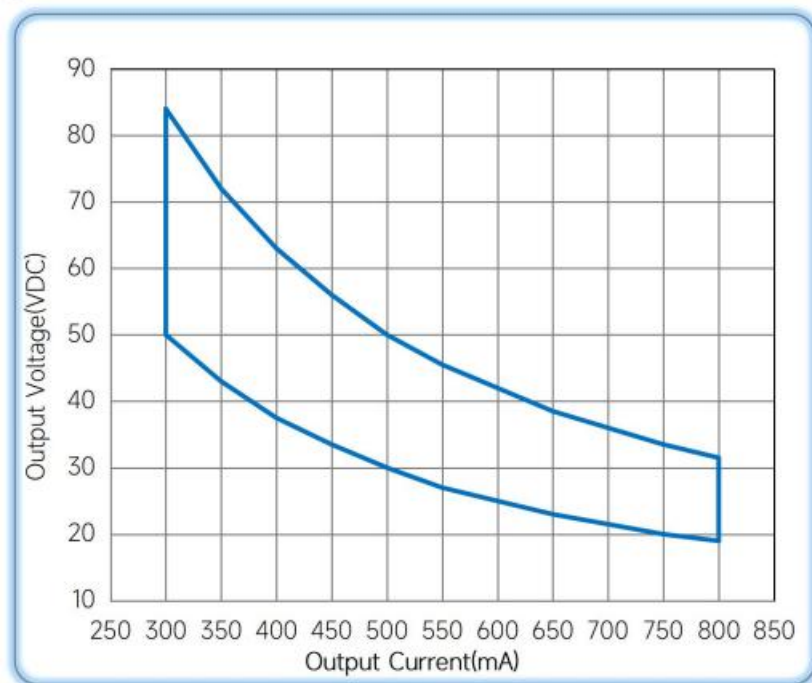

— Operating window 100%

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/05/15

Remark: The final interpretation of the contents of the specification belongs to Astralux.

E-mail: sales@astralux-driver.com
 Website : www.astralux-driver.com