


18W Constant Voltage-SS Series



■ Approve

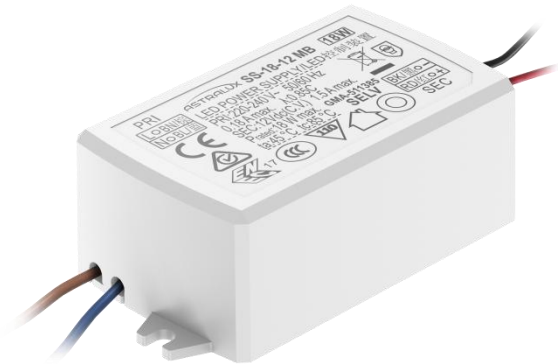

Features

- Class II, SELV, built-in
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP
- Power Factor 0.85C
- Efficiency $\geq 80\%$
- 5 years warranty

Applications


- LED strips

◆ Description

SS-18-XX MB is a 18W constant voltage LED driver that operates from 198-264Vac input with 12V or 24V output voltage. With it's compact dimensions from 68.5 x 35 x 23.2 mm it is easy to integrate in LED strips, pendant lights. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

◆ Model code

SS-18-XX MB

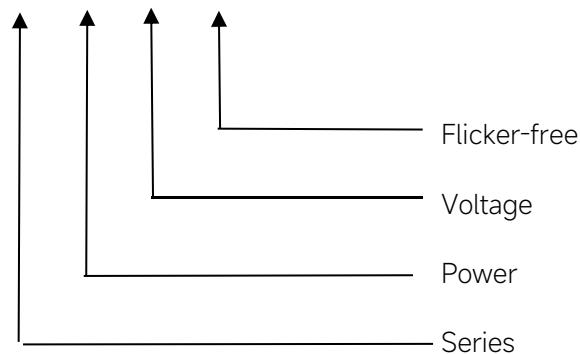

◆ Specification

Output	Constant Voltage	12VDC	24VDC
	Current Range	0-1.5A	0-0.75A
	Voltage Accuracy	±2%	
	Output HF current ripple(≥1KHz)	±5%	
	Output LF current ripple(≤120Hz)	±1%	
	Efficiency(Typ.)	≥80%	≥85%
Input	Rated input voltage	220-240VAC	
	Range of input voltage	176-264VAC	
	Rated input voltage(DC)	198-254VDC	
	Frequency(Hz)	0/50/60 Hz	
	Power Factor	0.85C@Full Load,230VAC	
	Input Current max	0.18A MAX. @Full Load,176VAC	
	Start-up time	< 0.5S	
	No Load Power	≤0.5W	
	THD (Typ.)	< 44%@Full Load, 240VAC	
Protection	Over Load Protection	105-150%	
		YES/Auto Resume	
	Over Voltage Protection	> 12.6VDC	> 25.2VDC
		YES/Auto Resume	
	Short circuit Protection	YES/Auto Resume	
Over Temperature Protection	YES/Auto Resume		
Environment	Operating Temperature	-20°C~-+45°C	
	Humidity	20%-90%RH	
	Tc	85°C	
	Storage Temperature	-20°C...+60°C	
	Life time	> 50000h@Tc=85°C,230VAC	
Surface	Dimension	68.5X35X23.2(LXWXH)mm	
standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547;		
Others	ErP	EU 2019/2020	
	RoHS	RoHS (2011/65/EU) (EU)2015/863	
Note	1.All parameters NOT specially mentioned are measured at 240VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor.		


◆ Model list

No.	Model number	Input			Output		
		Voltage (VAC)	Current (A)	Frequenc y	Constant voltage (VDC)	Normal working	Prated (W)
1	SS-18-12 MB	220-240	0.18	50/60	12	0-1.5	18
2	SS-18-24 MB	220-240	0.18	50/60	24	0-0.75	18


Note:

Test condition: 230Vac/50Hz, at full Load;

◆ Wiring diagram

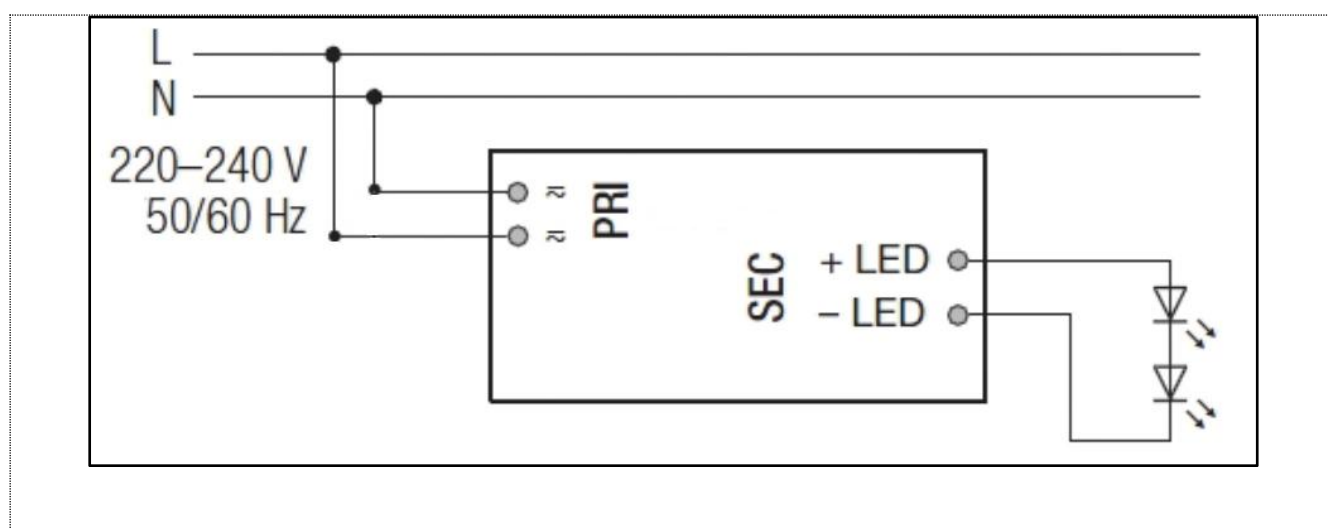


◆ 2D diagram

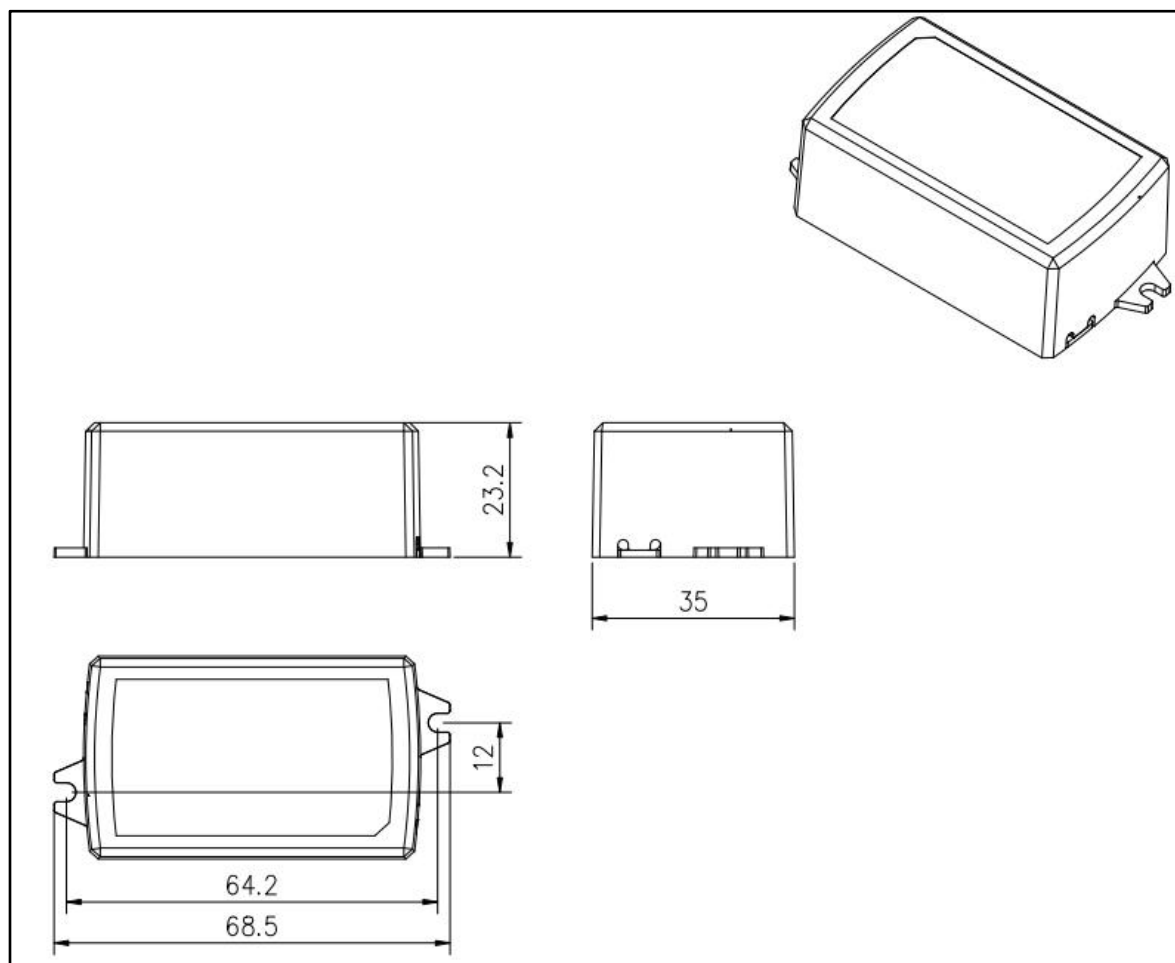


◆ Curve for SS-18-XX MB


Lifetime vs. Ambient Temperature Curve

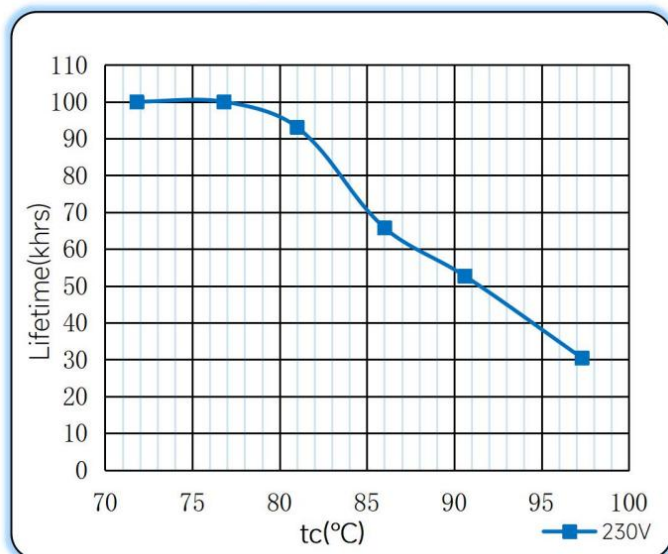


Efficiency vs. Load

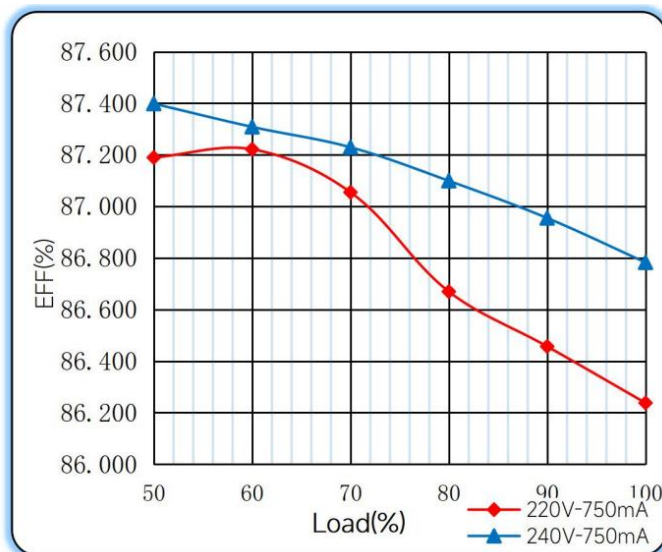


Power Factor Characteristics

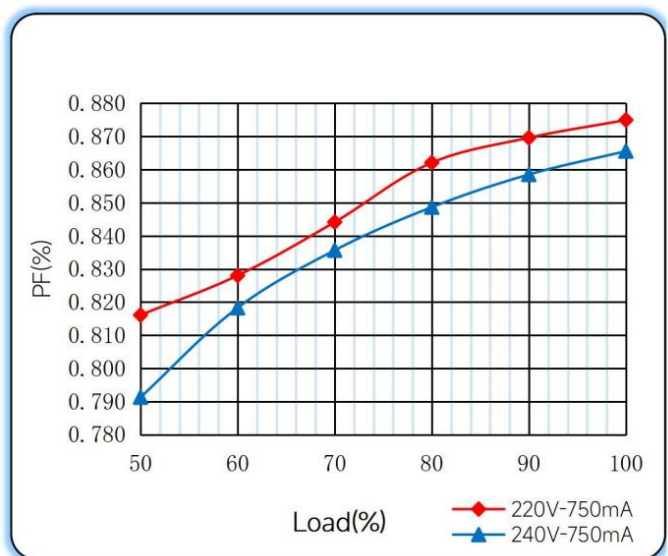

THD vs. Load

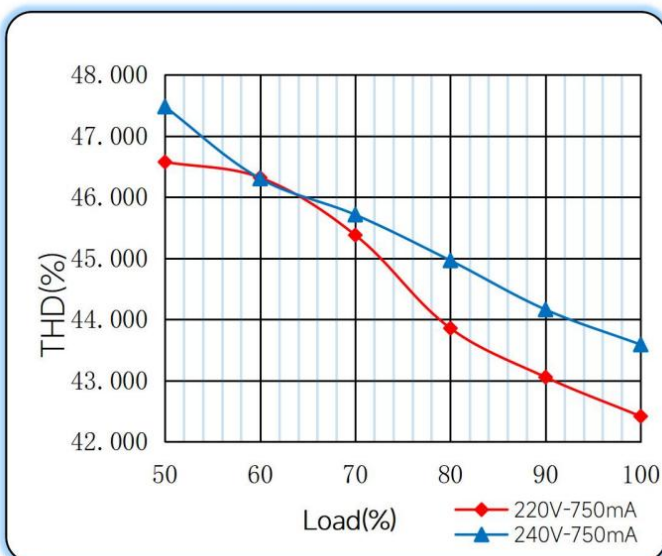

◆ Operating window

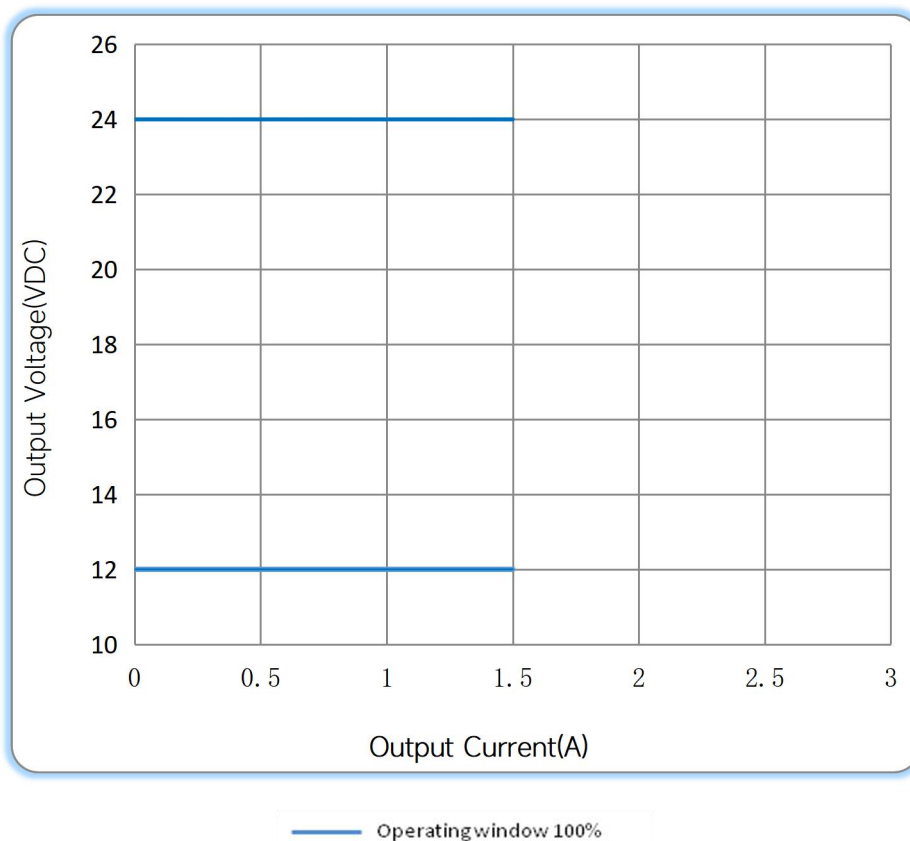

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/05/15

Remark: The final interpretation of the contents of the specification belongs to Astralux.

E-mail: sales@astralux-driver.com
 Website : www.astralux-driver.com