


60W Constant Voltage-SS Series



■ Approve

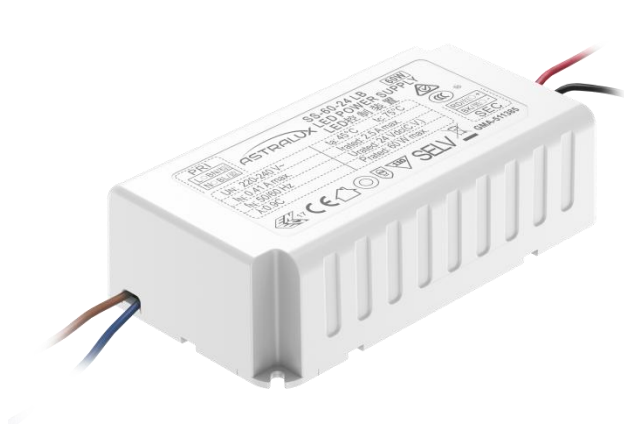

Features

- Class II, SELV, built-in
- Input Voltage 220-240VAC
- Protections: SCP/OLP/OVP/OTP
- Power Factor 0.9C
- Efficiency $\geq 87\%$
- 5 years warranty


Applications

- LED strips

◆ Description

SS-60-24 LB is a 60W constant voltage LED driver that operates from 198-264Vac input with 24V output voltage. With it's compact dimensions from 110.5 x 59.5 x 32.5 mm it is easy to integrate in LED strips and pendant light products. To ensure trouble-free operation, protection is provided against output short circuit and over Load.

◆ Model code

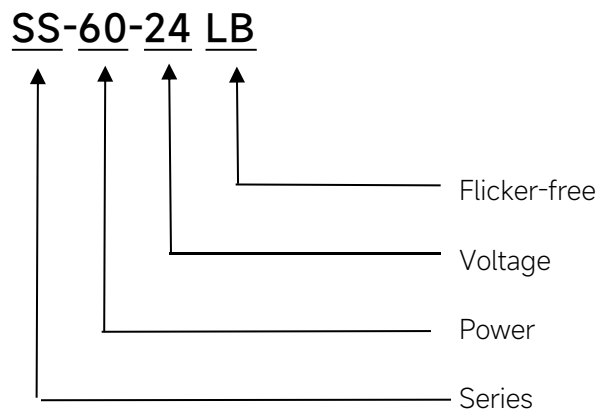

◆ Specification

Output	Constant Voltage	24VDC
	Current Range	0-2.5A
	Voltage Accuracy	±1%
	Output HF current ripple(≥1KHz)	±5%
	Output LF current ripple(≤120Hz)	±3%
	Efficiency(Typ.)	≥87%
Input	Rated input voltage	220-240VAC
	Range of input voltage	198-264VAC
	Rated input voltage(DC)	176-280VDC
	Frequency(Hz)	0/50/60 Hz
	Power Factor	0.9C@Full Load, 240VAC
	Input Current max	0.41A MAX. @Full Load,198VAC
	Start-up time	< 0.5S
	No Load Power	≤0.5W
	THD (Typ.)	<10%@Full Load, 240VAC
Protection	Over Load Protection	105-150% YES/Auto Resume
	Over Voltage Protection	> 25.2VDC YES/Auto Resume
	Short circuit Protection	YES/Auto Resume
	Over Temperature Protection	YES/Auto Resume
Environment	Operating Temperature	-20°C~+45°C
	Humidity	20%-90%RH
	Tc	75°C
	Storage Temperature	-20°C...+60°C
	Life time	> 50000h@Tc=75°C
Surface	Dimension	110.5X59.5X32.5(LXWXH)mm
standards	EN 61347-1; EN61347-2-13; EN62384; EN55015; EN61000-3-2 ; EN61000-3-3; EN 61547;	
Others	ErP	EU 2019/2020
	RoHS	RoHS (2011/65/EU) (EU)2015/863
Note	1.All parameters NOT specially mentioned are measured at 240VAC input , full load and 25°C of ambient temperature. 2.Ripple & Noise are measured at 20MHz of bandwidth by using a 300mm twisted pair-wire terminated with a 0.1uF & 47 uF parallel capacitor.	


◆ Model list

No.	Model number	Input			Output		
		Voltage (VAC)	Current (A)	Frequenc y	Constant voltage (VDC)	Normal working	Prated (W)
1	SS-60-24 LB	220-240	0.41	50/60	24	0-2.5	60


Note:

Test condition: 230Vac/50Hz, at full Load;

◆ Wiring diagram

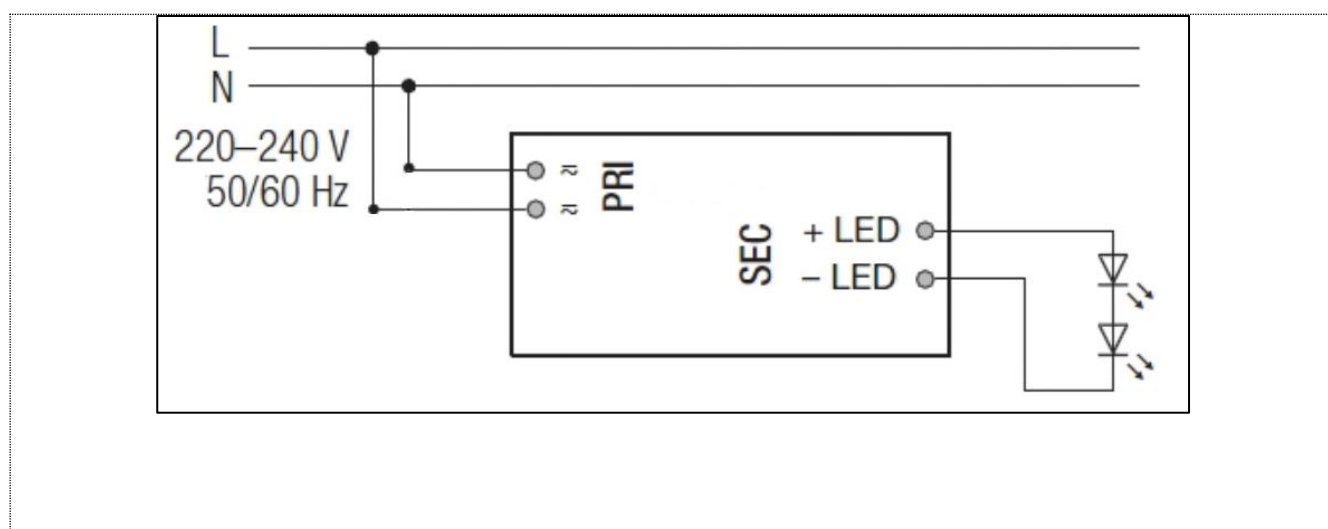


◆ 2D diagram

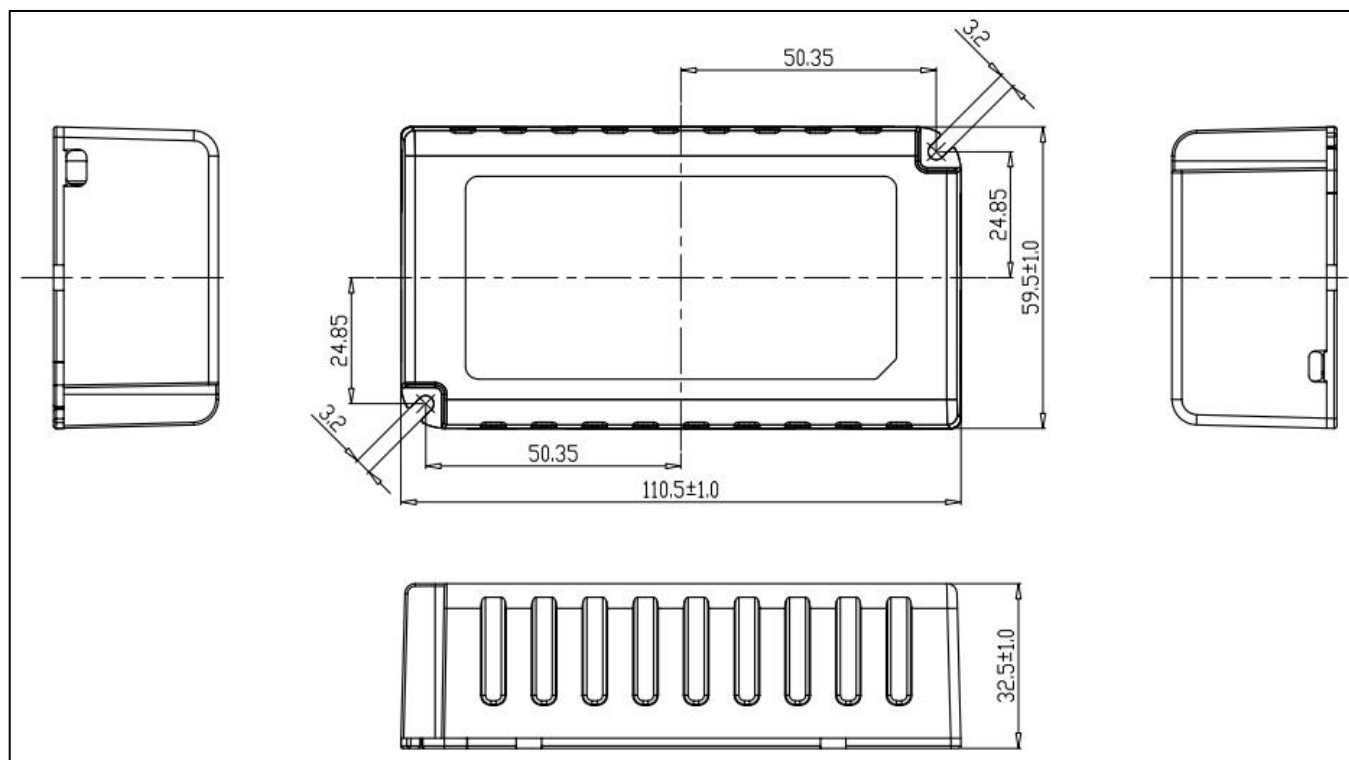


◆ Curve for SS-60-24 LB


Lifetime vs. Ambient Temperature Curve

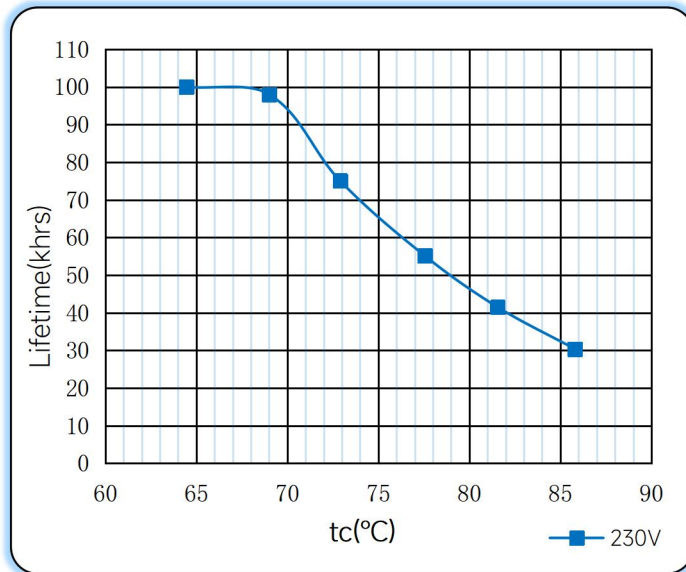


Efficiency vs. Load

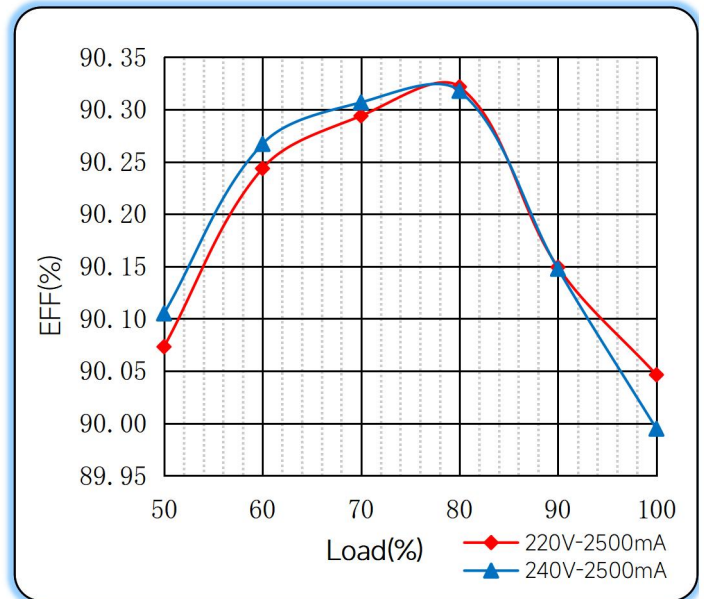


Power Factor Characteristics

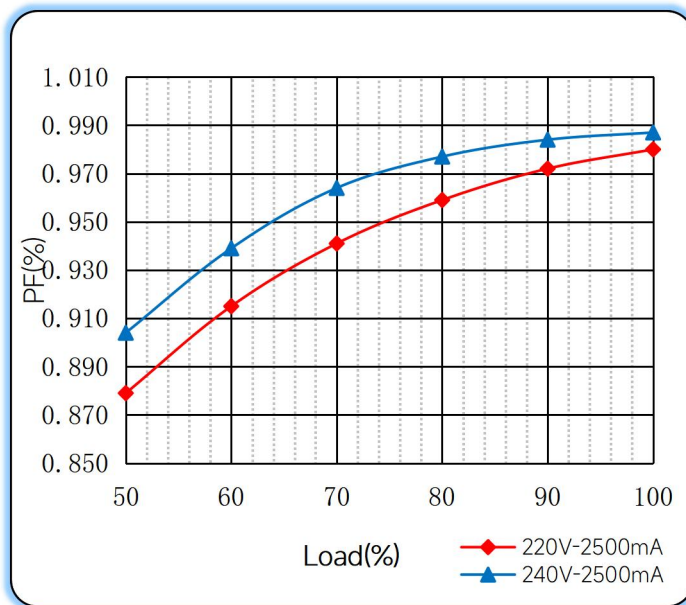

THD vs. Load

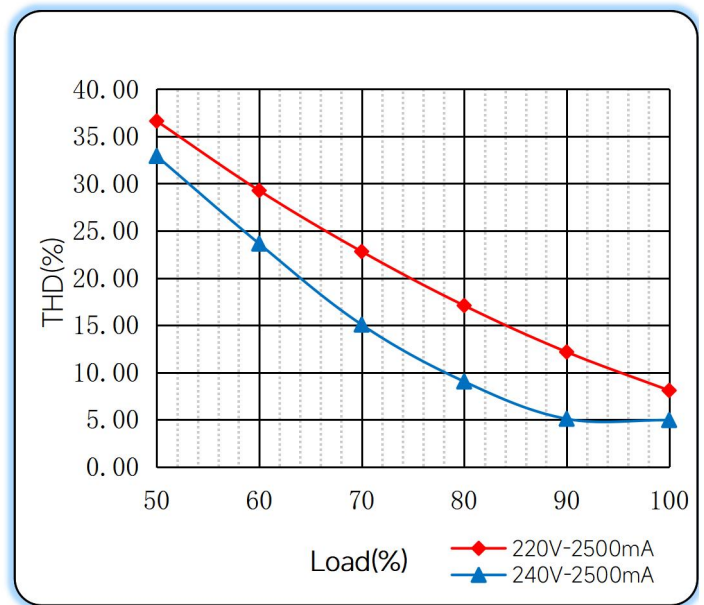

◆ Operating window

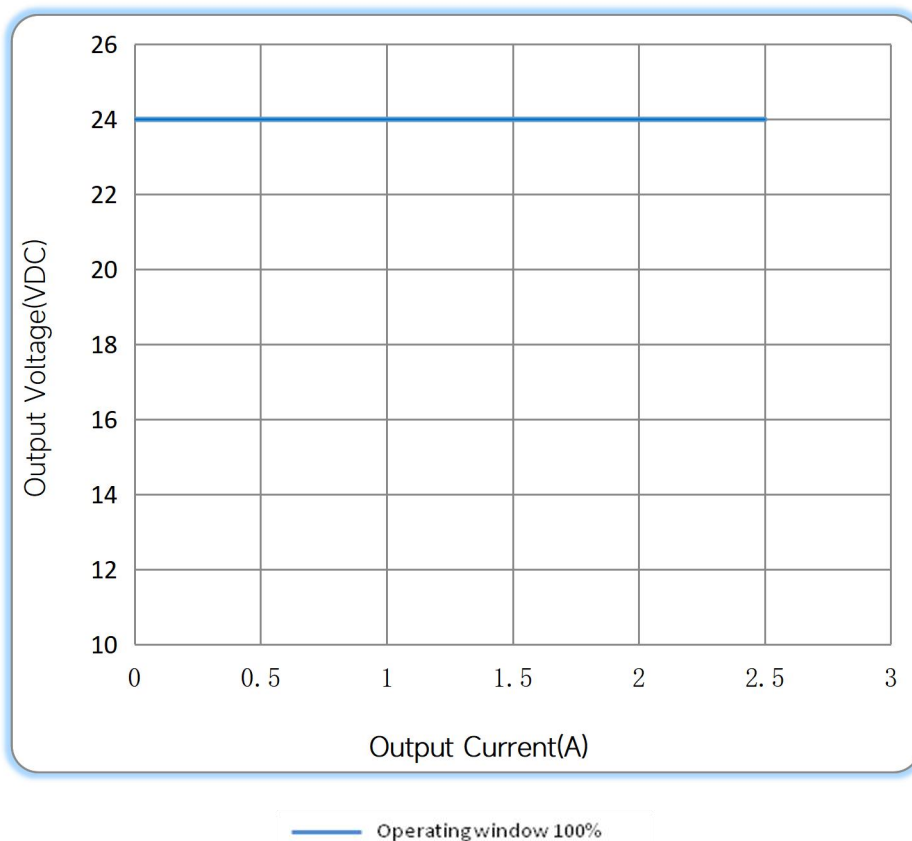

◆ Revision Updates

ITEM	BEFORE	AFTER	VERSION	DATE
Initial			A	2022/05/15

Remark: The final interpretation of the contents of the specification belongs to Astralux.

E-mail: sales@astralux-driver.com
 Website : www.astralux-driver.com